

Service 3 unit | BG3

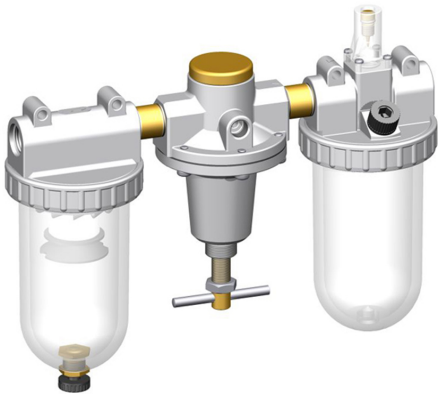


Image shows:
9.3033.00.005.0V



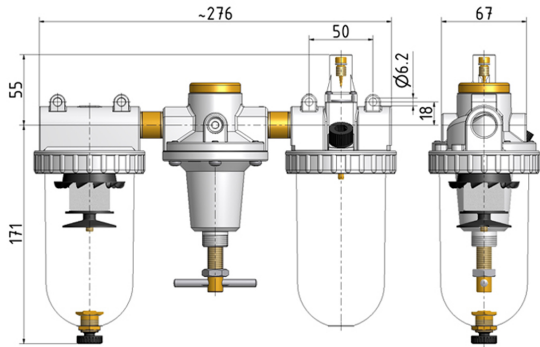


Image shows:
9.3033.00.005.0V


flow characteristic



pressure characteristic



lubricator operating limit




symbol



technical data

- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature, proportional oiler
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **drain:** HA3
- **mounting:** vertical
- **filter element:** 5 µm
- **bowl volume lubricator:** 135 cm³
- **oil metering qv=1.000l/min:** 1 - 2 drops/min
- **oil type:** CL 32 DIN 51517 - ISO VG 32

accessories









- **mounting bracket:** [BW.30](#)

- **control panel mounting:** nut DR.11-7

type	part-number	description
FRO.33 HA3	9.3033.00.005.0V	Service 3 unit G1/2 0,5-10 5µm with PC bowl and semi automatic drain
FRO.33 AM10 B	9.3033.00.013.0V	Service 3 unit G1/2 0,5-10 5µm with PC bowl, bowl guard and automatic drain

Service 3 unit | BG3

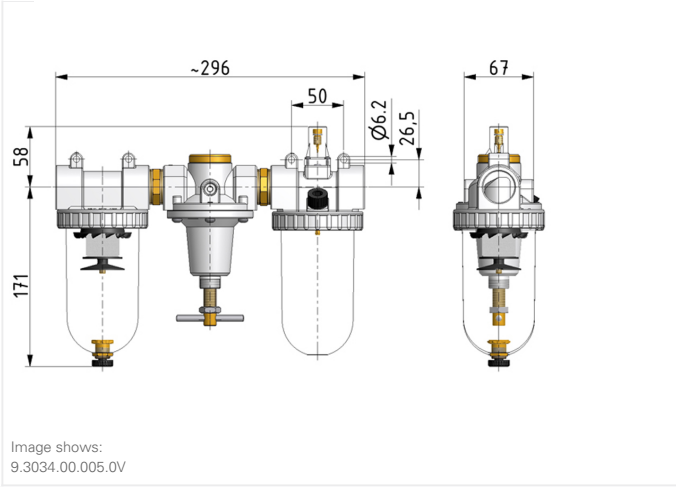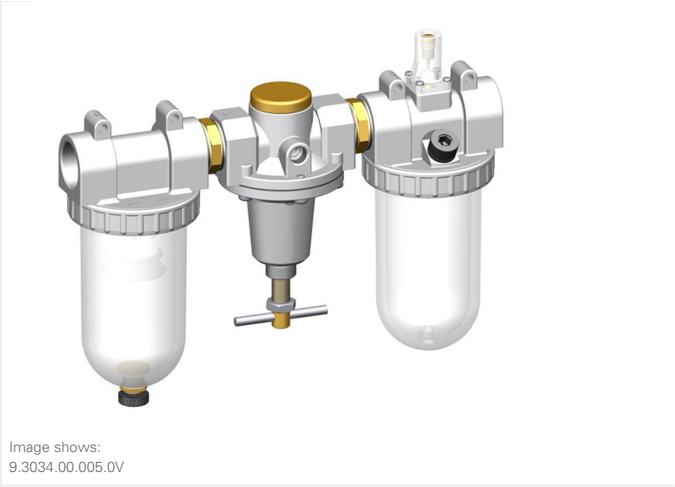

- technical data**
- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature, proportional oiler
 - **medium:** compressed air, neutral gases
 - **supply pressure P1 min.:** 1,5 bar
 - **supply pressure P1 max.:** 16 bar
 - **temperature range:** -10°C - +60°C
 - **bowl:** PC
 - **drain:** HA3
 - **mounting:** vertical
 - **filter element:** 5 µm
 - **bowl volume lubricator:** 135 cm³
 - **oil metering qv=1.000l/min:** 1 - 2 drops/min
 - **oil type:** CL 32 DIN 51517 - ISO VG 32

- accessories**
- mounting bracket: [BW.30](#)
 - control panel mounting: nut DR.11-7

type	part-number	description
FRO.34 HA3	9.3034.00.005.0V	Service 3 unit G3/4 0,5-10 5µm with PC bowl and semi automatic drain
FRO.35 HA3	9.3035.00.005.0V	Service 3 unit G1 0,5-10 5µm with PC bowl and semi automatic drain
FRO.35 HA3 B	9.3035.00.008.0V	Service 3 unit G1 0,5-10 5µm with PC bowl, bowl guard and semi automatic drain
FRO.35 AM10	9.3035.00.010.0V	Service 3 unit G1 0,5-10 5µm with PC bowl and automatic drain