

Service 3 unit | BG5

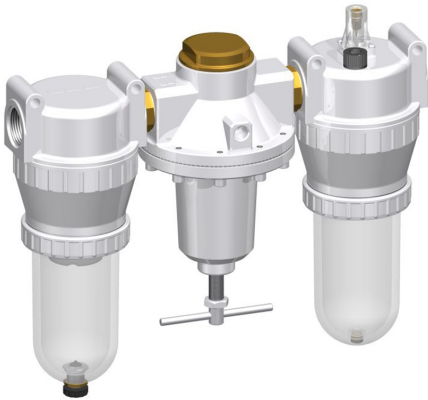


Image shows:  
9.3055.00.125.0V



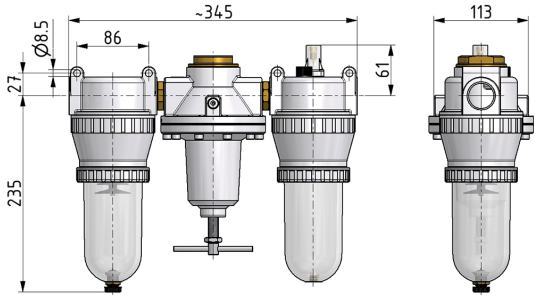


Image shows:  
9.3055.00.125.0V


flow characteristic



pressure characteristic



lubricator operating limit




symbol



technical data

- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature, proportional oiler
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **drain:** HA3
- **mounting:** vertical
- **filter element:** 40 µm
- **bowl volume lubricator:** 550 cm<sup>3</sup>
- **oil metering qv=1.000l/min:** 1 - 2 drops/min
- **oil type:** CL 32 DIN 51517 - ISO VG 32

accessories



- mounting bracket: [BW.50](#)

type

FRO.55 HA3

part-number

9.3055.00.125.0V

description

Service 3 unit G1 0,5-10 40µm with PC bowl and semi automatic drain