

Service 3 unit | BG8



Image shows:
9.3088.00.125.0



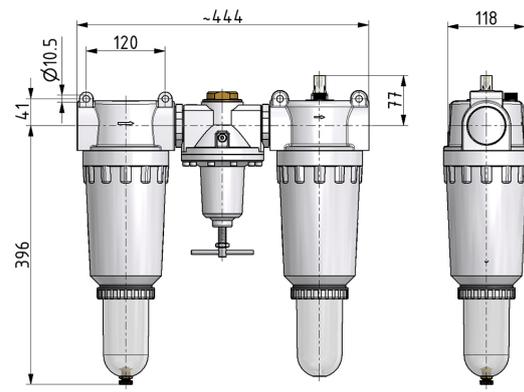


Image shows:
9.3088.00.125.0


flow characteristic

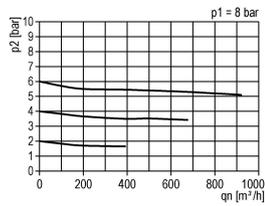

pressure characteristic

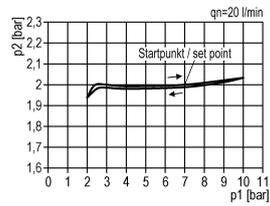

lubricator operating limit

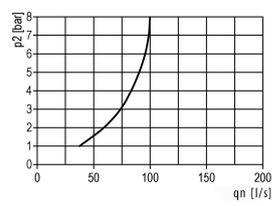

symbol



technical data

- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature, proportional oiler
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **drain:** HA3
- **mounting:** vertical
- **filter element:** 60 µm
- **bowl volume lubricator:** 1700 cm³
- **oil metering qv=1.000l/min:** 1 - 2 drops/min
- **oil type:** CL 32 DIN 51517 - ISO VG 32

accessories



- **mounting bracket:** [BW.50](#)

type	part-number	description
FRO.88 HA3	9.3088.00.125.0	Service 3 unit G2 0,5-10 60µm with PC bowl and semi automatic drain
FRO.88 M HA3	9.3088.00.127.0	Service 3 unit G2 0,5-10 60µm with metal bowl and semi automatic drain
FRO.88 HA3 B	9.3088.00.128.0	Service 3 unit G2 0,5-10 60µm with PC bowl, bowl guard and semi automatic drain
FRO.88 M AM10	9.3088.00.132.0	Service 3 unit G2 0,5-10 60µm with metal bowl and automatic drain
FRO.88 AM10 B	9.3088.00.133.0	Service 3 unit G2 0,5-10 60µm with PC bowl, bowl guard and automatic drain