

Service 2 unit | BGO



Image shows:
9.3100.00.005.0V



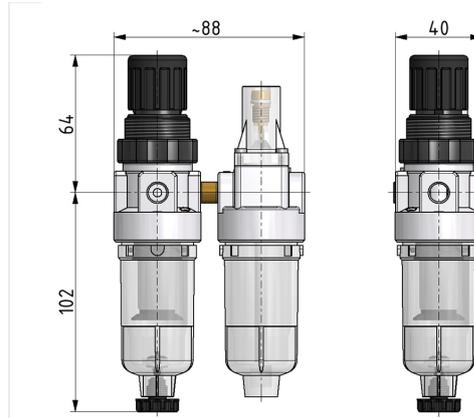


Image shows:
9.3100.00.005.0V


flow characteristic




pressure characteristic



lubricator operating limit



symbol



technical data

- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature, proportional oiler
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **drain:** HA
- **mounting:** vertical
- **filter element:** 5 µm
- **bowl volume lubricator:** 17 cm³
- **oil metering qv=1.000/min:** 1 - 2 drops/min
- **oil type:** CL 32 DIN 51517 - ISO VG 32

accessories

- 
- **control panel mounting:**
[WH.M.30/DR.00-34](#)

type	part-number	description
FDO.00 HA4	9.3100.00.005.0V	Service 2 unit G1/8 0,5-10 5µm with PC bowl and semi automatic drain
FDO.01 HA4	9.3101.00.005.0V	Service 2 unit G1/4 0,5-10 5µm with PC bowl and semi automatic drain
FDO.01 M HA4	9.3101.00.007.0V	Service 2 unit G1/4 0,5-10 5µm with metal bowl and semi automatic drain

Service 3 unit

Service 2 unit

Filter regulator

Filter

Pressure regulator

Lubricator

System extensions

Accessories

Special products