

Service 2 unit | BG1



Image shows:
9.3112.00.005.0V



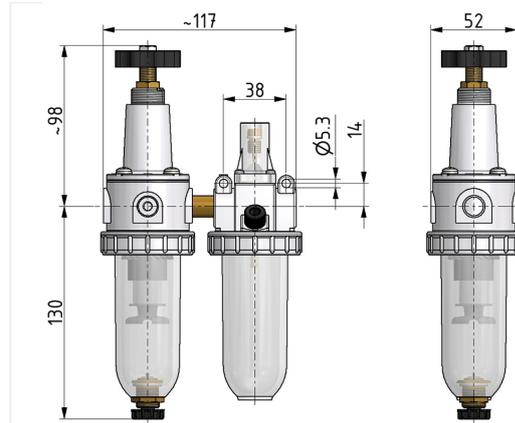


Image shows:
9.3112.00.005.0V


flow characteristic




pressure characteristic



lubricator operating limit




symbol



technical data

- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature, proportional oiler
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **drain:** HA3
- **mounting:** vertical
- **filter element:** 5 µm
- **bowl volume lubricator:** 40 cm³
- **oil metering qv=1.000l/min:** 1 - 2 drops/min
- **oil type:** CL 32 DIN 51517 - ISO VG 32

accessories



- mounting bracket: [BW.10](#)

- control panel mounting: nut DR.11-7

type

FDO.12 HA3

part-number

9.3112.00.005.0V

description

Service 2 unit G3/8 0,5-10 5µm with PC bowl and semi automatic drain