

## Service 2 unit | BG3



Image shows:  
9.3133.00.005.0V



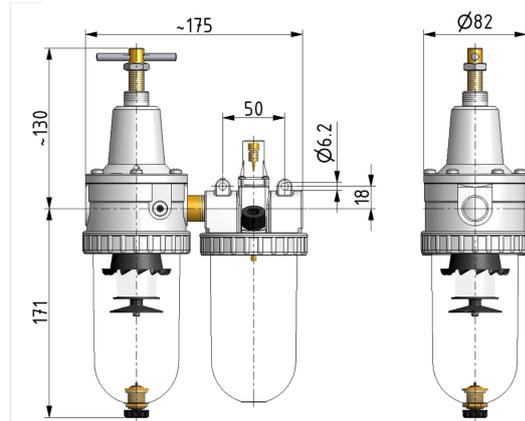


Image shows:  
9.3133.00.005.0V


### flow characteristic

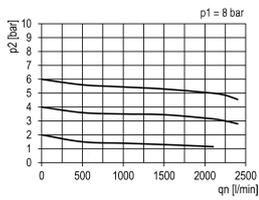

### pressure characteristic

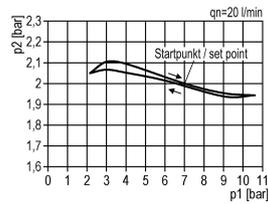

### lubricator operating limit

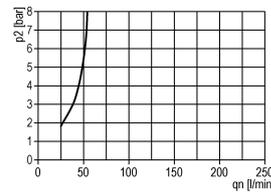

### symbol



### technical data

- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature, proportional oiler
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **drain:** HA3
- **mounting:** vertical
- **filter element:** 5 µm
- **bowl volume lubricator:** 135 cm<sup>3</sup>
- **oil metering qv=1.000l/min:** 1 - 2 drops/min
- **oil type:** CL 32 DIN 51517 - ISO VG 32

### accessories



- mounting bracket: [BW.30](#)

- control panel mounting: nut DR.11-7

type	part-number	description
FDO.33 HA3	9.3133.00.005.0V	Service 2 unit G1/2 0,5-10 5µm with PC bowl and semi automatic drain
FDO.33 M HA3	9.3133.00.007.0V	Service 2 unit G1/2 0,5-10 5µm with metal bowl and semi automatic drain
FDO.33 HA3 B	9.3133.00.008.0V	Service 2 unit G1/2 0,5-10 5µm with PC bowl, bowl guard and semi automatic drain
FDO.33 AM10	9.3133.00.010.0V	Service 2 unit G1/2 0,5-10 5µm with PC bowl and automatic drain