

## Filter regulator | BG2



Image shows:  
9.1922.00.125.0V



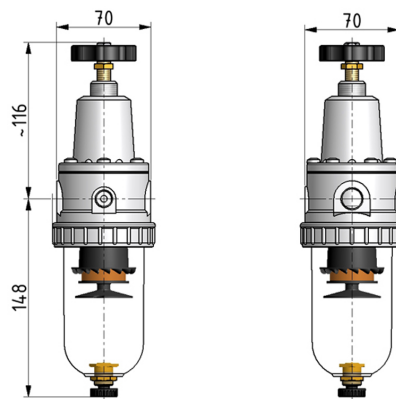


Image shows:  
9.1922.00.125.0V


### flow characteristic



### pressure characteristic




### symbol



### technical data

- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **drain:** HA3
- **mounting:** vertical
- **filter element:** 40 µm

### accessories



- mounting bracket: [BW.30](#)

- control panel mounting: nut DR.11-7

| type        | part-number      | description                                                                         |
|-------------|------------------|-------------------------------------------------------------------------------------|
| FD.22 HA3   | 9.1922.00.125.0V | Filter regulator G3/8 0,5-10 40µm with PC bowl and semi automatic drain             |
| FD.22 M HA3 | 9.1922.00.127.0V | Filter regulator G3/8 0,5-10 40µm with metal bowl and semi automatic drain          |
| FD.22 AM10  | 9.1922.00.130.0V | Filter regulator G3/8 0,5-10 40µm with PC bowl and automatic drain                  |
| FD.23 HA3   | 9.1923.00.125.0V | Filter regulator G1/2 0,5-10 40µm with PC bowl and semi automatic drain             |
| FD.23 HA3 B | 9.1923.00.128.0V | Filter regulator G1/2 0,5-10 40µm with PC bowl, bowl guard and semi automatic drain |
| FD.23 AM10  | 9.1923.00.130.0V | Filter regulator G1/2 0,5-10 40µm with PC bowl and automatic drain                  |