

Filter regulator | BG3



Image shows:
9.1933.00.005.0V



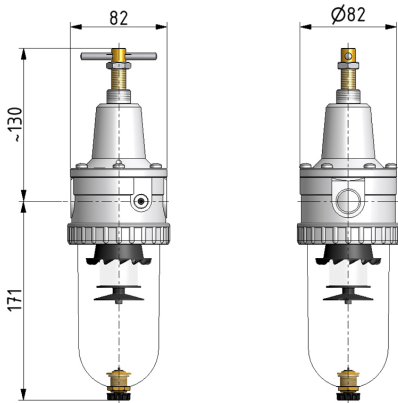


Image shows:
9.1933.00.005.0V


flow characteristic



pressure characteristic




symbol



technical data

- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **drain:** HA3
- **mounting:** vertical
- **filter element:** 5 µm

accessories



- **mounting bracket:** [BW.30](#)
- **control panel mounting:** nut DR.11-7

type	part-number	description
FD.33 HA3	9.1933.00.005.0V	Filter regulator G1/2 0,5-10 5µm with PC bowl and semi automatic drain
FD.33 M HA3	9.1933.00.007.0V	Filter regulator G1/2 0,5-10 5µm with metal bowl and semi automatic drain
FD.33 HA3 B	9.1933.00.008.0V	Filter regulator G1/2 0,5-10 5µm with PC bowl, bowl guard and semi automatic drain
FD.33 AM10	9.1933.00.010.0V	Filter regulator G1/2 0,5-10 5µm with PC bowl and automatic drain
FD.33 M AM10	9.1933.00.012.0V	Filter regulator G1/2 0,5-10 5µm with metal bowl and automatic drain