

## Filter regulator | BG5



Image shows:  
9.1954.00.130.0



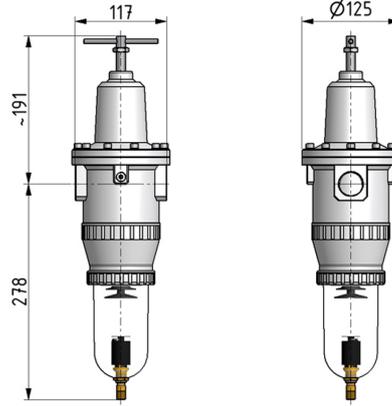


Image shows:  
9.1954.00.130.0


### flow characteristic

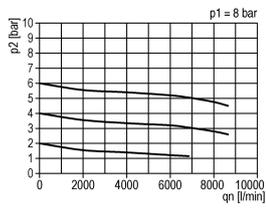

### pressure characteristic

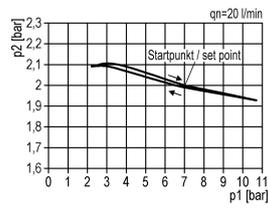

### symbol



### technical data

- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **drain:** AM NO
- **mounting:** vertical
- **filter element:** 40 µm

### accessories



- **mounting bracket:** [BW.50](#)

type	part-number	description
FD.54 AM10	9.1954.00.130.0	Filter regulator G3/4 0,5-10 40µm with PC bowl and automatic drain
FD.55 HA3	9.1955.00.125.0	Filter regulator G1 0,5-10 40µm with PC bowl and semi automatic drain
FD.55 M HA3	9.1955.00.127.0	Filter regulator G1 0,5-10 40µm with metal bowl and semi automatic drain
FD.55 AM10	9.1955.00.130.0	Filter regulator G1 0,5-10 40µm with PC bowl and automatic drain
FD.55 M AM10	9.1955.00.132.0	Filter regulator G1 0,5-10 40µm with metal bowl and automatic drain
FD.55 AM10 B	9.1955.00.133.0	Filter regulator G1 0,5-10 40µm with PC bowl, bowl guard and automatic drain