

Lubricator | BG3

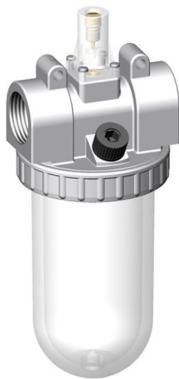


Image shows:
 9.2334.00.000.0V



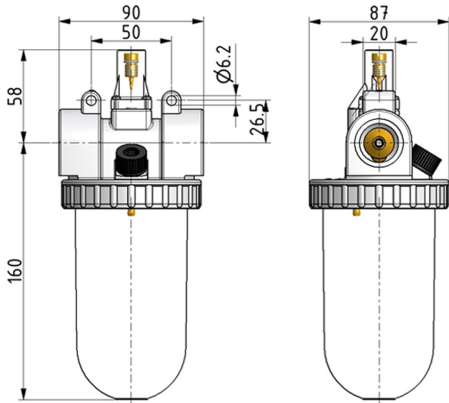


Image shows:
 9.2334.00.000.0V


flow characteristic

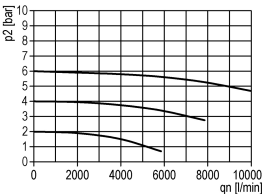

lubricator operating limit




symbol



technical data

- **description:** proportional lubricator
- **medium:** compressed air, neutral gases
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **mounting:** vertical
- **bowl volume lubricator:** 135 cm³
- **oil type:** CL 32 DIN 51517 - ISO VG 32
- **dome assembly:** PC
- **oil fill in:** can be filled with oil during operation

accessories



- mounting bracket: [ZW.30](#)

- electrical level indicator (version addition: N)

type	part-number	description
DO.34	9.2334.00.000.0V	Lubricator G3/4 with PC bowl
DO.34 M	9.2334.00.002.0V	Lubricator G 3/4 with metal bowl
DO.34 B	9.2334.00.003.0V	Lubricator G 3/4 with metal bowl and bowl guard
DO.35	9.2335.00.000.0V	Lubricator G1 with PC bowl
DO.35 M	9.2335.00.002.0V	Lubricator G1 with metal bowl
DO.35 B	9.2335.00.003.0V	Lubricator G1 with PC bowl and bowl guard