




Filter regulator of the Futura series

Filter regulator G3/8 0,5-8 5µm with PC bowl, bowl guard and semi automatic drain

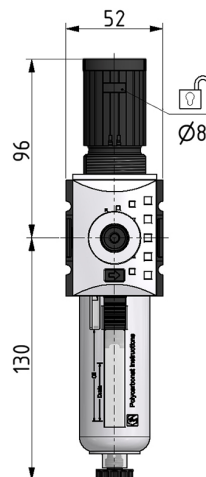


type	part-number	series	port size	flow rate	adjustment range P2 max.	weight
KFRG-138/8	92101.DD00	Futura	G 3/8	2500 l/min	8 bar	0.352 kg


flow characteristic

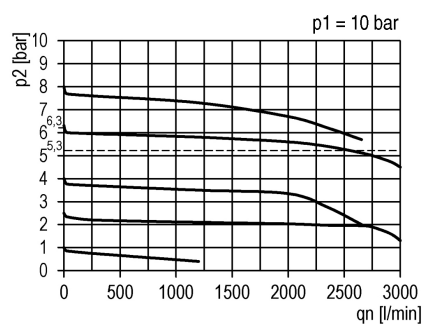

pressure characteristic

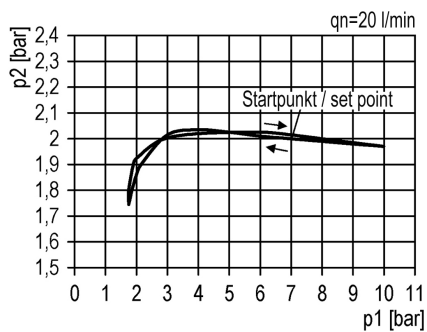

symbol

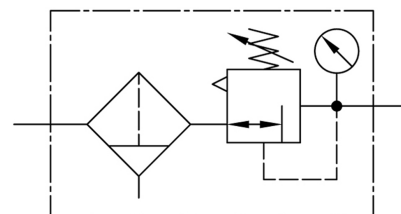

technical data

- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +50°C
- **bowl:** PC with PA bowl guard
- **drain:** HA
- **locking:** rotary lock or padlock possible
- **mounting:** vertical
- **filter element:** 5 µm

accessories



- mounting bracket:
[KBW 1-1225](#)



- coupling kit wall mounting:
[KKOP 1W](#)



- control panel mounting:
[KBW 1-1227](#) + SM.1

- rotary lock: VH.31 without key or VH.32 with key