



Filter regulator of the Futura series

Filter regulator G1 0,5-8 5µm with PC bowl, bowl guard and semi automatic drain

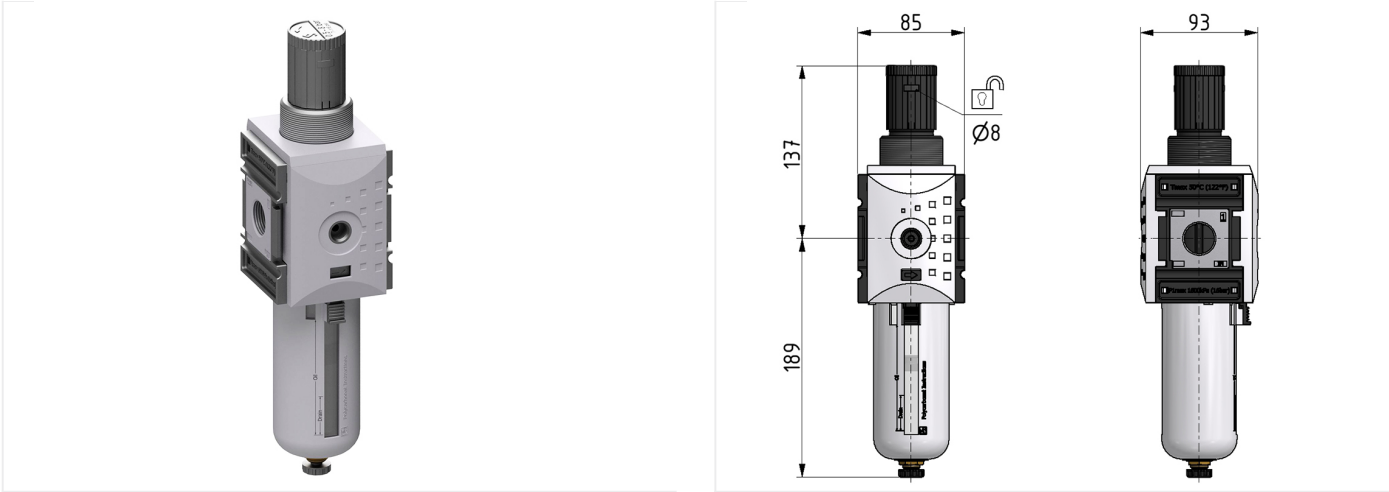

type	part-number	series	port size	flow rate	adjustment range P2 max.	weight
KFRG-41/8	92104.GG00	Futura	G 1	13000 l/min	8 bar	1.135 kg

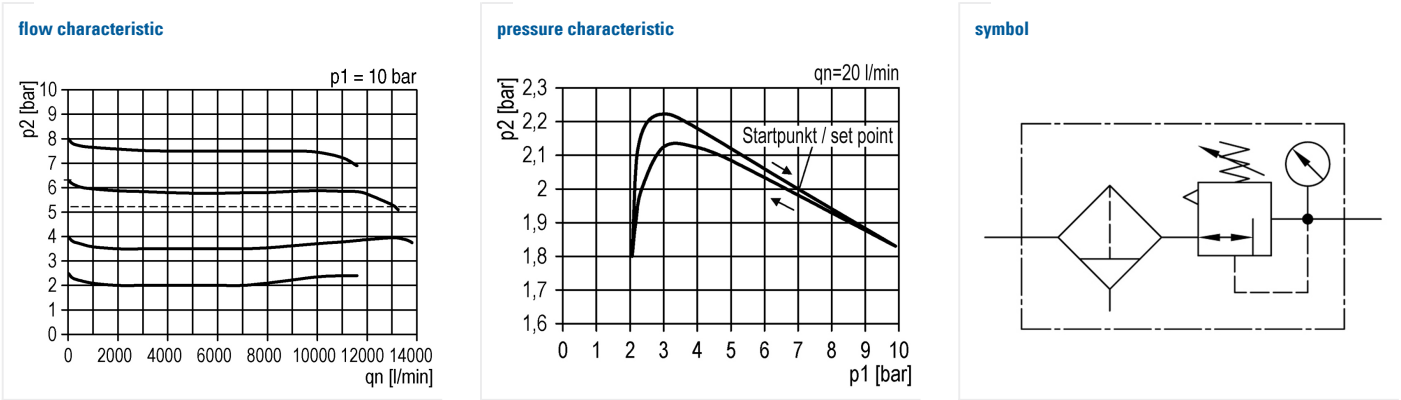

technical data • description: sinter filter centrifugal principle, pilot controlled diaphragm-type pressure with relieving feature • medium: compressed air, neutral gases • supply pressure P1 min.: 1,5 bar • supply pressure P1 max.: 16 bar • temperature range: -10°C - +50°C • bowl: PC with PA bowl guard • drain: HA • locking: lockable setting knob • mounting: vertical • filter element: 5 µm • air consumption: max. 1,5 l/min								
accessories <table><tr><td>  • mounting bracket: KBW 4-1225 </td><td>  • coupling kit wall mounting: KKOP 4W </td><td> • control panel mounting: control panel nut C.33-42 </td></tr><tr><td colspan="3"> • rotary lock: VH.31 without key or VH.32 with key </td></tr></table>			 • mounting bracket: KBW 4-1225	 • coupling kit wall mounting: KKOP 4W	• control panel mounting: control panel nut C.33-42	• rotary lock: VH.31 without key or VH.32 with key		
 • mounting bracket: KBW 4-1225	 • coupling kit wall mounting: KKOP 4W	• control panel mounting: control panel nut C.33-42						
• rotary lock: VH.31 without key or VH.32 with key								